

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number  
**WO 02/054638 A1**

(51) International Patent Classification<sup>7</sup>: H04B 17/00, 7/04

(74) Agents: **PAGE WHITE & FARRER** et al.; 54 Doughty Street, London WC1N 2LS (GB).

(21) International Application Number: PCT/EP01/15155

(22) International Filing Date:  
20 December 2001 (20.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0031841.0 29 December 2000 (29.12.2000) GB

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **THIROLA, Esa** [FI/FI]; Rensselikuja 5 N 19, FIN-90630 Oulu (FI). **PAJUKOSKI, Kari** [FI/FI]; Purantie 3, FIN-90240 Oulu (FI).

(81) Designated States (*national*): AL, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: INTERFERENCE POWER ESTIMATION FOR ADAPTIVE ANTENNA SYSTEM

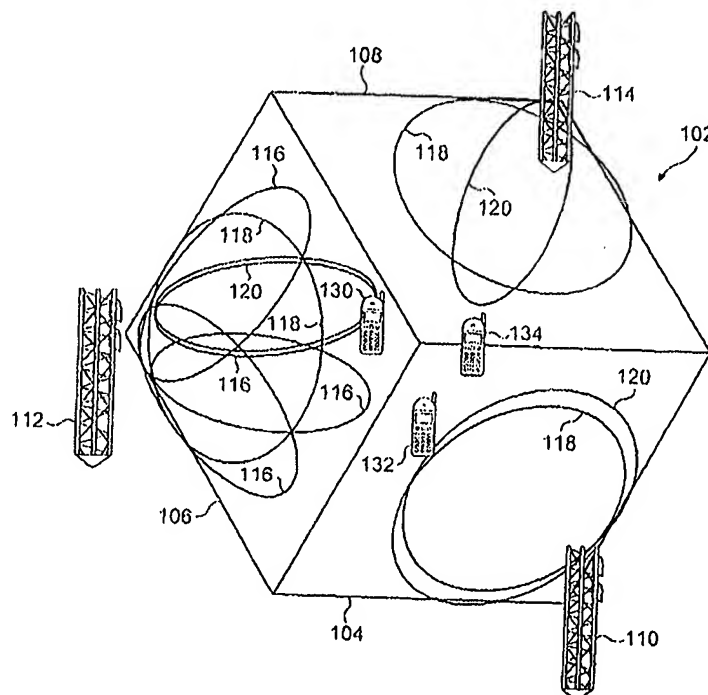

(57) Abstract: There is proposed a technique for determining an estimate of interference power, in the receiver of a communication system utilising adaptive antenna techniques. The technique uses information transmitted in the antenna signals and in the beam signals to determine the estimate of the interference power.

WO 02/054638 A1



*before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

INTERFERENCE POWER ESTIMATION FOR ADAPTIVE ANTENNA SYSTEMField of the Invention

The present invention relates to a technique for estimating interference power in the receiver of an adaptive antenna system, and particularly but not exclusively for fast power control purposes in a mobile station receiver in a mobile communication system.

Background to the Invention

In wide-band code division multiple access (W-CDMA) systems, precise power control is one of the basic requirements for high system capacity. Transmit powers in the down-link should be kept as low as possible in order to minimise interference, but high enough to ensure the required quality of service. Furthermore, in the downlink, it is desirable to provide a marginal amount of additional power to mobile stations at the cell edge, as they suffer from increased other-cell interference.

Even though a relatively slow power control algorithm is able to compensate for large-scale attenuation, distance attenuation and shadow fading, a fast power control algorithm is needed for multi-path fading for slowly moving mobiles.

In the forward link, i.e. the down-link, of a wide-band code division multiple access (WCDMA) system, the inner-loop power control adjusts the base-station transmit power in order to keep the received down-link signal-to-interference ratio (SIR) at a given target level (at the mobile station). The SIR target is defined according to the quality requirements. For reliable SIR estimation, narrowband estimation (after de-spreading) has to be employed. This is important especially in the down-link direction of the W-CDMA system because of the usage of orthogonal channelization codes. Tight delay requirements of the power control demand that the SIR estimation has to be obtained on a slot-by-slot basis.

The SIR estimation is divided into: a) signal power estimation; and b) interference power estimation.

In the forward link of a wide-band code division multiple access (WCDMA) system, a primary common pilot channel (P-CPICH) is broadcast over the entire cell or a sector. The P-CPICH is broadcast also in the case of a multi-beam arrangement (multiple beams per sector) and in the user specific beamforming. Therefore there always exists one such channel per sector regardless of the applied transmission scheme.

In the case of single antenna transmission, the interference power estimation is currently performed based on the primary common pilot channel. However, when utilising adaptive antenna techniques the dedicated channels are usually transmitted through a narrow beam, which means that the P-CPICH and down-link physical channels (DL-DPCH) experience different channel characteristics in transmission to the mobile station antenna. Due to that the fading of DL-DPCH can be almost uncorrelated compared to that of P-CPICH. The correlation depends on the angular spread of the radio channel (seen from the base transceiver station).

In current known systems, the down-link dedicated physical control channel (DL-DPCCH) is used for power interference estimation for the DL-DPCH (beam signal) in adaptive antenna systems because of the fact that the P-CPICH (antenna signal) does not usually experience the same channel characteristics on transmission to a mobile station antenna.

It is an aim of the present invention to provide an improved technique for estimating interference power in the receiver of an adaptive antenna system.

#### Summary of the Invention

In accordance with one aspect of the present invention there is provided a method of estimating the interference power in a receiver of a communication system having an adaptive antenna transmitter comprising: receiving a beam signal; receiving an antenna signal; and estimating the interference power of the received beam signal based on information received in the received antenna signal.

The antenna signal, in this context, is the signal that is broadcast for many users commonly (transmitted over the entire sector) whereas the beam signal is a user specific transmission (a group of users -- specific transmission in the case of multi-beam system).

It is also possible to generate the antenna signal by transmitting it from all the elements of the antenna array. The beam signal is generally transmitted over a part of the sector. In the case of adaptive antenna transmission schemes, the so-called antenna and beam signals can experience different channel characteristics on transmission to a mobile station antenna. The step of estimating the interference power may be further based on the received beam signal. The antenna signal may include a common pilot channel, the step of estimating interference power being based on signals received in the common pilot

channel. The beam signal may include a dedicated channel, the step of estimating interference power being further based on signals received in the dedicated channel. The communication system may be a W-CDMA system. The antenna signal may include a primary common pilot channel. The beam signal may include a secondary common pilot channel. The step of estimating interference power may utilise pilot signals transmitted in the primary common pilot channel. The step of estimating interference power may utilise pilot signals transmitted in the secondary common pilot channel. The beam signal may include a dedicated physical channel. The step of estimating interference power may utilise pilot signals transmitted in the dedicated physical channel. The interference power may be estimated using equal gain combining.

The interference power may be estimated using:

$$\hat{h}_l^{(c)} = \frac{1}{N_c} \sum_{i=1}^{N_c} r_{l,i}^{(c)} a_i^{(c)*}$$

$$\hat{I} = \frac{1}{L} \sum_{l=1}^L \frac{1}{N_c} \sum_{i=1}^{N_c} \left| r_{l,i}^{(c)} - \hat{h}_l^{(c)} \right|^2$$

where:

$\hat{h}_l^{(c)}$  = Channel estimate of P-CPICH channel,  $l$  is path index

$N_c$  = Number of pilot symbols per time slot in P-CPICH channel

$a_i^{(c)}$  = Complex pilot symbol of P-CPICH channel,  $i$  is symbol index

$r_{l,i}^{(c)}$  = Received complex pilot symbol from P-CPICH channel

The interference power may be estimated using maximal ratio combining.

The interference power may be estimated using:

$$\hat{h}_l^{(d)} = \frac{1}{N_d} \sum_{i=1}^{N_d} r_{l,i}^{(d)} a_i^{(d)*}$$

$$\hat{I} = \sum_{l=1}^L \left[ \left| \hat{h}_l^{(d)} \right|^2 \frac{1}{N_c} \sum_{i=1}^{N_c} \left| r_{l,i}^{(c)} - \hat{h}_l^{(c)} \right|^2 \right]$$

Where:

$\hat{h}_l^{(d)}$  = Channel estimate of DL-DPCCH channel,  $l$  is path index

$N_d$  = Number of dedicated pilot symbols in timeslot

$a_i^{(d)}$  = Dedicated complex pilot symbol,  $i$  is symbol index

$r_{i,l}^{(d)}$  = Received complex pilot symbol from dedicated channel

The invention further provides a method of estimating interference power in a receiver of  
5 a W-CDMA communication system having an adaptive antenna transmitter comprising:  
receiving a beam signal having a dedicated physical control channel; receiving an  
antenna signal having a primary common pilot channel; and estimating interference  
power on the received beam signal based on pilot signals received in the primary  
common pilot channel.

10 The interference power estimation may be additionally based on dedicated symbols  
received in the dedicated physical channel. The interference power estimation may be  
additionally based on pilot signals received in the secondary common pilot channel. In  
accordance with a further aspect of the present invention there is provided a receiver of a  
communication system having an adaptive antenna transmitter comprising: first input  
15 means for receiving a beam signal; second input means for receiving an antenna signal;  
and estimating means, connected to the second input means, for estimating the  
interference power of the received beam signal based on information received in the  
antenna signal.

The estimating means may be further connected to the first input means, for estimating  
20 the parameters based on information additionally received in the beam signal. The  
antenna signal may include a common pilot channel, the information being received in  
the common pilot channel. The beam signal may include a dedicated channel, the  
information being additionally received in the dedicated channel. A W-CDMA system  
may include such a receiver. A W-CDMA system may include at least one mobile station  
25 including such a receiver. The antenna signal may include a primary common pilot  
channel. The beam signal may include a secondary common pilot channel. The  
estimation of the interference power may utilise pilot signals transmitted in the primary  
common pilot channel. The estimation of the interference power may utilise pilot signals  
transmitted in the secondary common pilot channel. The beam signal may include a  
30 dedicated physical channel. The estimation of interference power may utilise signals  
transmitted in the dedicated physical channel.

### Brief Description of the Figures

The invention will be best understood by way of example with reference to the following Figures in which:

Figure 1 illustrates exemplary W-CDMA base station cell utilising different transmission schemes in each (three-sectorized configuration);,

Figure 2 illustrates in block diagram form elements of a receiver necessary for implementing the present invention; and

Figure 3 illustrates simulation results comparing the technique of the prior art of that of the present invention.

### 10 Description of the Preferred Embodiment

With reference to Figure 1, there is now described an example of multi-sector W-CDMA cells with respect to which the invention is illustrated. The invention is not, however, in any way limited to such a specific example.

A plurality of mobile stations, or user equipment roam within the cell. For example, as shown in Figure 1, mobile station 130 is connected in cell 106, mobile station 132 is connected in cell 104, and mobile station 134 is connected in cells 104 and 108.

The base station cell 102 is divided into  $N$  sectors, where  $N=3$  in the example of Figure 1.

As exemplified by sector 106 of Figure 1, each sector can be divided into either  $K$  fixed beams or steerable (user specific) beams using a base transceiver station 112. The beams 116 represent the secondary common pilot channel, the beam 120 the down-link dedicated physical channel, and the beam 118 the primary common pilot channel.

Sector 104 of Figure 1 illustrates the traditional single antenna transmission scheme utilizing a base transceiver station 110. The beam 120 the down-link dedicated physical channel, and the beam 118 the primary common pilot channel.

Sector 108 of Figure 1 illustrates user specific beam-forming using a base transceiver station 114. The beam 120 the down-link dedicated physical channel, and the beam 118 the primary common pilot channel.

Figure 1 thus illustrates the CPICHs needed in the different transmission schemes, and the DL-CPCH of a single user.

For the purposes of describing the present invention, two of the three base transceiver stations of the example of Figure 1 use adaptive antenna techniques for communicating with mobile stations in the various sectors of the cell. The two sectors utilizing adaptive antenna techniques are sectors 106 and 108. Adaptive antenna techniques are well-known in the art, and the present invention is not directly concerned with any specific implementation details of such techniques. As a skilled person will be familiar with, when using adaptive antenna techniques the base transceiver station 100 transmits mobile specific data to a mobile station through a narrow beam.

The W-CDMA specification defines three different types of pilot channels in the forward link for an adaptive antenna system. These pilot channels are:

1. P-CPICH (Primary Common Pilot Channel);
2. S-CPICH (Secondary Common Pilot Channel); and
3. Dedicated pilot symbols in DPCH (Dedicated Physical Control Channel).

The P-CPICH is broadcast over an entire sector in a multi-sector arrangement, and there exists only one such channel for each sector. The P-CPICH is used in the hand-over measurements and cell selection/reselection procedures. Another function of the P-CPICH channel, when the common channels are not associated with dedicated channels or not involved in adaptive antenna techniques, is to aid the channel estimation at the mobile station for the dedicated channels, and to provide a channel estimation reference for the common channels.

The S-CPICH may be transmitted over the entire cell or over only part of the cell. There may be zero, one or several S-CPICHs per cell or sector. One typical area of S-CPICH usage is operations with base stations having multiple beams (fixed) per sector. The S-CPICHs are used for identifying different beams at the mobile station.

The dedicated pilot symbols are multiplexed into the down-link dedicated physical channel (DPCH). They are used in signal-to-interference ratio (SIR) estimation and are also used in the channel estimation. If the mobile station or user equipment is informed that the P-CPICH is not the phase reference and there is no S-CPICH available, then the



dedicated pilot bits in the DL-DPCCH are the phase reference for the DL-DPCH. This may happen, for example, in the case of user-specific beam forming.

In accordance with the present invention, it is proposed to use the primary common pilot channel P-CPICH for estimating interference power in a mobile station or user equipment  
5 in the receiver of an adaptive antenna system.

Even though user specific beam forming is applied in adaptive antenna systems, the P-CPICH must be broadcast.

A proposed implementation of an interference power estimation technique in accordance with the present invention is provided hereinafter.

10 If the interference is considered as additive white Gaussian noise (AWGN) type, and the channel is maintained constant during the estimation period, the optimum choice for estimating the unknown variance is the minimum variance unbiased (MVU). Below there is presented the MVU interference estimation method in accordance with the present invention.

15 The received signal is denoted as  $X$ , and is defined as:

$$x(n) = A + w(n) \quad (1)$$

where  $A$  is the amplitude of signal, and  $w(n)$  is a zero-mean white noise with power  $\sigma^2$ . The MVU estimator for the noise power is then:

$$\hat{\sigma}^2 = E(|X - E(X)|^2) \quad (2)$$

20 which can be shown to reduce to:

$$\hat{\sigma}^2 = E(|X|^2) - |E(X)|^2 \quad (3)$$

The expected value of (2) is

$$E(\hat{\sigma}^2) = \frac{p}{p+1} \sigma^2, \quad (4)$$

where  $p$  is the number of samples used for estimation.

25 The variance of (2) is:

$$\text{var}(\hat{\sigma}^2) = \frac{2(p-1)\sigma^4}{p^2}. \quad (5)$$

When implementing the MVU estimator in a W-CDMA system, the idea is to calculate interference power separately for each temporal rake finger of the rake receiver (DL-

DPCH finger positions). The total interference power estimate (after rake combining) is given by combining the finger-specific estimates. This can be done for example by taking an average of the finger-specific estimates (equal gain combining) or using the estimates of the dedicated channel for weighting (maximal ratio combining).

5 An example of a first embodiment utilizing equal gain combining is given hereinafter:

$$\hat{h}_l^{(c)} = \frac{1}{N_c} \sum_{i=1}^{N_c} r_{l,i}^{(c)} a_i^{(c)*} \quad (6)$$

$$\hat{I} = \frac{1}{L} \sum_{l=1}^L \frac{1}{N_c} \sum_{i=1}^{N_c} \left| r_{l,i}^{(c)} - \hat{h}_l^{(c)} \right|^2 \quad (7)$$

where:

$\hat{h}_l^{(c)}$  = Channel estimate of P-CPICH channel,  $l$  is path index

$N_c$  = Number of pilot symbols per time slot in P-CPICH channel

$a_i^{(c)}$  = Complex pilot symbol of P-CPICH channel,  $i$  is symbol index

15  $r_{l,i}^{(c)}$  = Received complex pilot symbol from P-CPICH channel

An example of maximal ratio combining, in a second embodiment, is given hereinafter:

$$\hat{h}_l^{(d)} = \frac{1}{N_d} \sum_{i=1}^{N_d} r_{l,i}^{(d)} a_i^{(d)*} \quad (8)$$

$$\hat{I} = \sum_{l=1}^L \left[ \left| \hat{h}_l^{(d)} \right|^2 \frac{1}{N_c} \sum_{i=1}^{N_c} \left| r_{l,i}^{(c)} - \hat{h}_l^{(c)} \right|^2 \right] \quad (9)$$

20 Where:

$\hat{h}_l^{(d)}$  = Channel estimate of DL-DPCCH channel,  $l$  is path index

$N_d$  = Number of dedicated pilot symbols in timeslot

$a_i^{(d)}$  = Dedicated complex pilot symbol,  $i$  is symbol index

$r_{l,i}^{(d)}$  = Received complex pilot symbol from dedicated channel

Referring to Figure 2, there is illustrated a block diagram of the main elements of a receiver suitable for implementing the present invention in an exemplary W-CDMA system.

Referring to Figure 2 there is provided a correlator bank 202, an MVU estimator 204, a  
 5 combiner 206 and a filter 208.

The correlator bank 202 acts as an input means to the receiver for the primary common pilot channel received by the antenna on line 210. The correlator bank 202 provides an output to the MVU estimator 204. The MVU estimator also receives on line 212 the delay positions of the DL-DPCH rake fingers (i.e. the finger allocation of the DL-DPCH). The  
 10 output of the MVU estimator provides an input to the combiner 206. The output of the combiner 206 is optionally filtered by filter 208. The output of the filter 208 provides the narrowband interference power estimate for the  $i$ th time slot.

A link level simulation has been performed to study the performance of interference power estimation in the case of user specific beam-forming. The main simulation and  
 15 radio environment related parameters are listed in Table I below. It is assumed that the beam signal (DL-DPCH) is transmitted by using a uniform linear antenna array having 8 antenna elements. The P-CPICH is transmitted by using the first element of the antenna array.

Interference power estimation methods to be compared	1. MVU-estimator based on DL-DPCCH 2. MVU-estimator based on P-CPICH
Channel profile	2-path Rayleigh
Speed of mobile	3 km/h
Geometry value	9.0 dB
Interelement spacing of antenna array	$\lambda / 2$
Mean angle of arrival	0 degrees
Angular spread	60 degrees

Spreading factor of DL-DPCH	128
# of DL-DPCH symbols	4
Spreading factor of P-CPICH	256
# of P-CPICH symbols	10
Power of P-CPICH	-10 dB
Operation point	Uncoded BER of 0.18
Power control	OFF

TABLE I

Comparison of DL-DPCH and P-CPICH based interference power estimator (MVU) in the case of user specific beamforming (in slot by slot basis).

- 5 The simulation results are shown in Figure 3. Figure 3 shows that the P-CPICH can be used in the interference power estimation of the DL-DPCH even when the angular spread is large (i.e. the antenna signal and beam signals are almost uncorrelated). It can be seen that interference power estimate obtained from P-CPICH, the central thick line in Figure 3, follow the changes in the orthogonal interference of DL-DPCH. Figure 2 also show
- 10 that that the variance of the I-estimate obtained from the P-CPICH is much smaller than in the case that it is estimated from DL-DPCH, which is illustrated by the light peripheral lines in Figure 3. This is due to two reasons:
1. In the P-CPICH channel there are more samples (de-spread symbols) to calculate the MVU estimate (see equation 5).
  - 15 2. In the P-CPICH channel the noise variance that to be estimated is lower than in DPCH channel due to higher spreading factor (see equation 5).

Thus the present invention provides a technique in which in a preferred embodiment the primary common pilot channel is used in the interference power estimation, which is part of the SIR estimation, of the down-link physical channel. This technique can be used in

20 antenna arrangements where beam-forming is utilized, regardless of the correlation

between the P-CPICH and the DL-DPCH. The performance of the proposed interference power estimator is not dependent on the transmit power of the P-CPICH channel.

The P-CPICH based interference power estimation method presented herein can estimate the orthogonal interference of DL-DPCCH even though the two channels were  
5 completely uncorrelated. The only restriction for the P-CPICH based interference power estimation described herein is that the delay positions of the temporal rake fingers have to be the same in both P-CPICH (antenna signal) and DL-DPCCH (beam signal).

Claims

1. A method of estimating the interference power in a receiver of a communication system having an adaptive antenna transmitter comprising: receiving a beam signal; receiving an antenna signal; and estimating the interference power of the received beam signal based on information received in the received antenna signal.  
5
2. A method according to claim 1 in which the step of estimating the interference power is further based on the received beam signal.
3. A method according to claim 1 or claim 2, wherein the antenna signal includes a common pilot channel, the step of estimating interference power being based on  
10 signals received in the common pilot channel.
4. A method according to claim 2 or claim 3, wherein the beam signal includes a dedicated channel, the step of estimating interference power being further based on signals received in the dedicated channel.
5. A method according to any one of claims 1 to 4 wherein the communication system  
15 is a W-CDMA system.
6. A method according to claim 5 wherein the antenna signal includes a primary common pilot channel.
7. A method according to claim 5 wherein the beam signal includes a secondary common pilot channel.
- 20 8. A method according to claim 6 wherein the step of estimating interference power utilises pilot signals transmitted in the primary common pilot channel.
9. A method according to claim 7 wherein the step of estimating interference power utilises pilot signals transmitted in the secondary common pilot channel.
10. A method according to any one of claims 5 to 9 wherein the beam signal includes a  
25 dedicated physical channel.
11. A method according to claim 10 wherein the step of estimating interference power utilises pilot signals transmitted in the dedicated physical channel.
12. A method according to claim 10 wherein the interference power is estimated using equal gain combining.
- 30 13. A method according to claim 12 wherein the interference power is estimated using:

$$\hat{h}_l^{(c)} = \frac{1}{N_c} \sum_{i=1}^{N_c} r_{l,i}^{(c)} a_i^{(c)*}$$

$$\hat{I} = \frac{1}{L} \sum_{l=1}^L \frac{1}{N_c} \sum_{i=1}^{N_c} |r_{l,i}^{(c)} - \hat{h}_l^{(c)}|^2$$

5 where:

$\hat{h}_l^{(c)}$  = Channel estimate of P-CPICH channel,  $l$  is path index

$N_c$  = Number of pilot symbols per time slot in P-CPICH channel

$a_i^{(c)}$  = Complex pilot symbol of P-CPICH channel,  $i$  is symbol index

$r_{l,i}^{(c)}$  = Received complex pilot symbol from P-CPICH channel

10 14. A method according to claim 10 wherein the interference power is estimated using maximal ratio combining.

15. A method according to claim 14 wherein the interference power is estimated using:

$$\hat{h}_l^{(d)} = \frac{1}{N_d} \sum_{i=1}^{N_d} r_{l,i}^{(d)} a_i^{(d)*}$$

15 
$$\hat{I} = \sum_{l=1}^L \left[ |\hat{h}_l^{(d)}|^2 \frac{1}{N_c} \sum_{i=1}^{N_c} |r_{l,i}^{(c)} - \hat{h}_l^{(c)}|^2 \right]$$

Where:

$\hat{h}_l^{(d)}$  = Channel estimate of DL-DPCCH channel,  $l$  is path index

$N_d$  = Number of dedicated pilot symbols in timeslot

$a_i^{(d)}$  = Dedicated complex pilot symbol,  $i$  is symbol index

20  $r_{l,i}^{(d)}$  = Received complex pilot symbol from dedicated channel


16. A method of estimating interference power in a receiver of a W-CDMA communication system having an adaptive antenna transmitter comprising: receiving a beam signal having a dedicated physical control channel; receiving an antenna signal having a primary common pilot channel; and estimating interference power on the received beam signal based on pilot signals received in the primary common pilot channel.

25

17. A method according to claim 16 wherein the interference power estimation is additionally based on dedicated symbols received in the dedicated physical channel.
18. A method according to claim 16 wherein the interference power estimation is additionally based on pilot signals received in the secondary common pilot channel.
- 5 19. A receiver of a communication system having an adaptive antenna transmitter comprising: first input means for receiving a beam signal; second input means for receiving an antenna signal; and estimating means, connected to the second input means, for estimating the interference power of the received beam signal based on information received in the antenna signal.
- 10 20. A receiver according to claim 19 in which the estimating means is further connected to the first input means, for estimating the parameters based on information additionally received in the beam signal.
21. A receiver according to claim 19 or claim 20, wherein the antenna signal includes a common pilot channel, the information being received in the common pilot channel.
- 15 22. A receiver according to claim 19 or claim 20, wherein the beam signal includes a dedicated channel, the information being additionally received in the dedicated channel.
23. A W-CDMA system including a receiver according to any one of claims 19 to 22.
24. A W-CDMA system including at least one mobile station including a receiver  
20 according to any one of claims 19 to 24.
25. A receiver according to claim 21 or claim 22 wherein the antenna signal includes a primary common pilot channel.
26. A receiver according to claim 21 or claim 22 wherein the beam signal includes a secondary common pilot channel.
- 25 27. A receiver according to claim 23 wherein the estimation of the interference power utilises pilot signals transmitted in the primary common pilot channel.
28. A receiver according to claim 23 wherein the estimation of the interference power utilises pilot signals transmitted in the secondary common pilot channel.
29. A receiver according to any one of claims 24 to 28 wherein the beam signal includes  
30 a dedicated physical channel.



30. A receiver according to claim 29 wherein the estimation of interference power utilises signals transmitted in the dedicated physical channel.

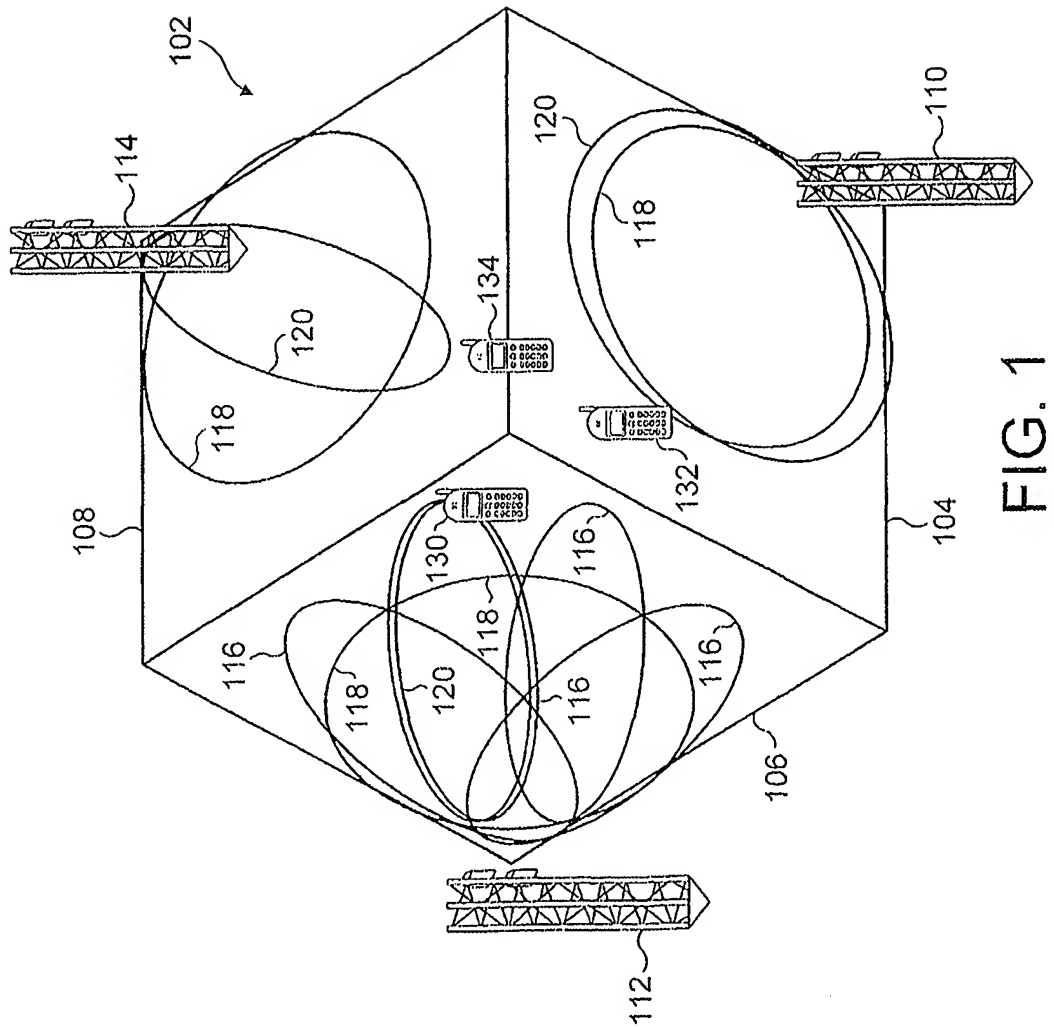

2 / 3

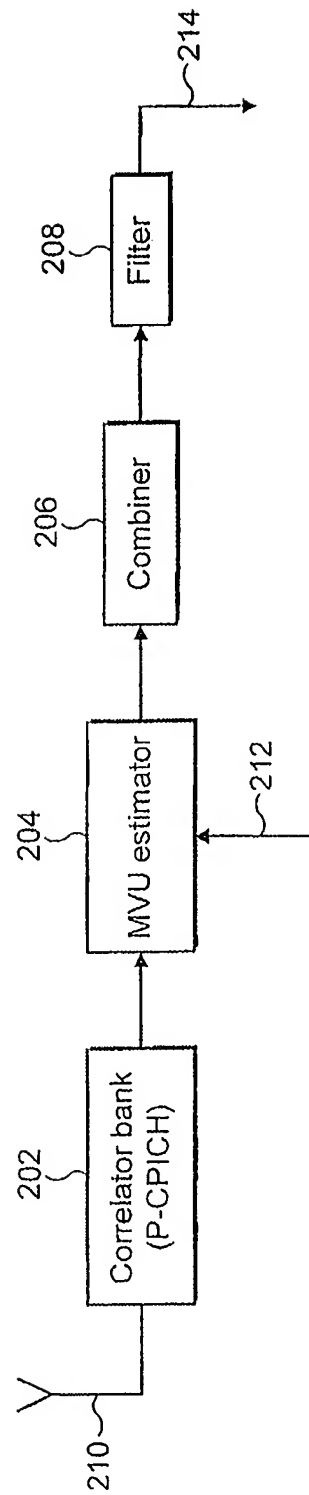


FIG. 2

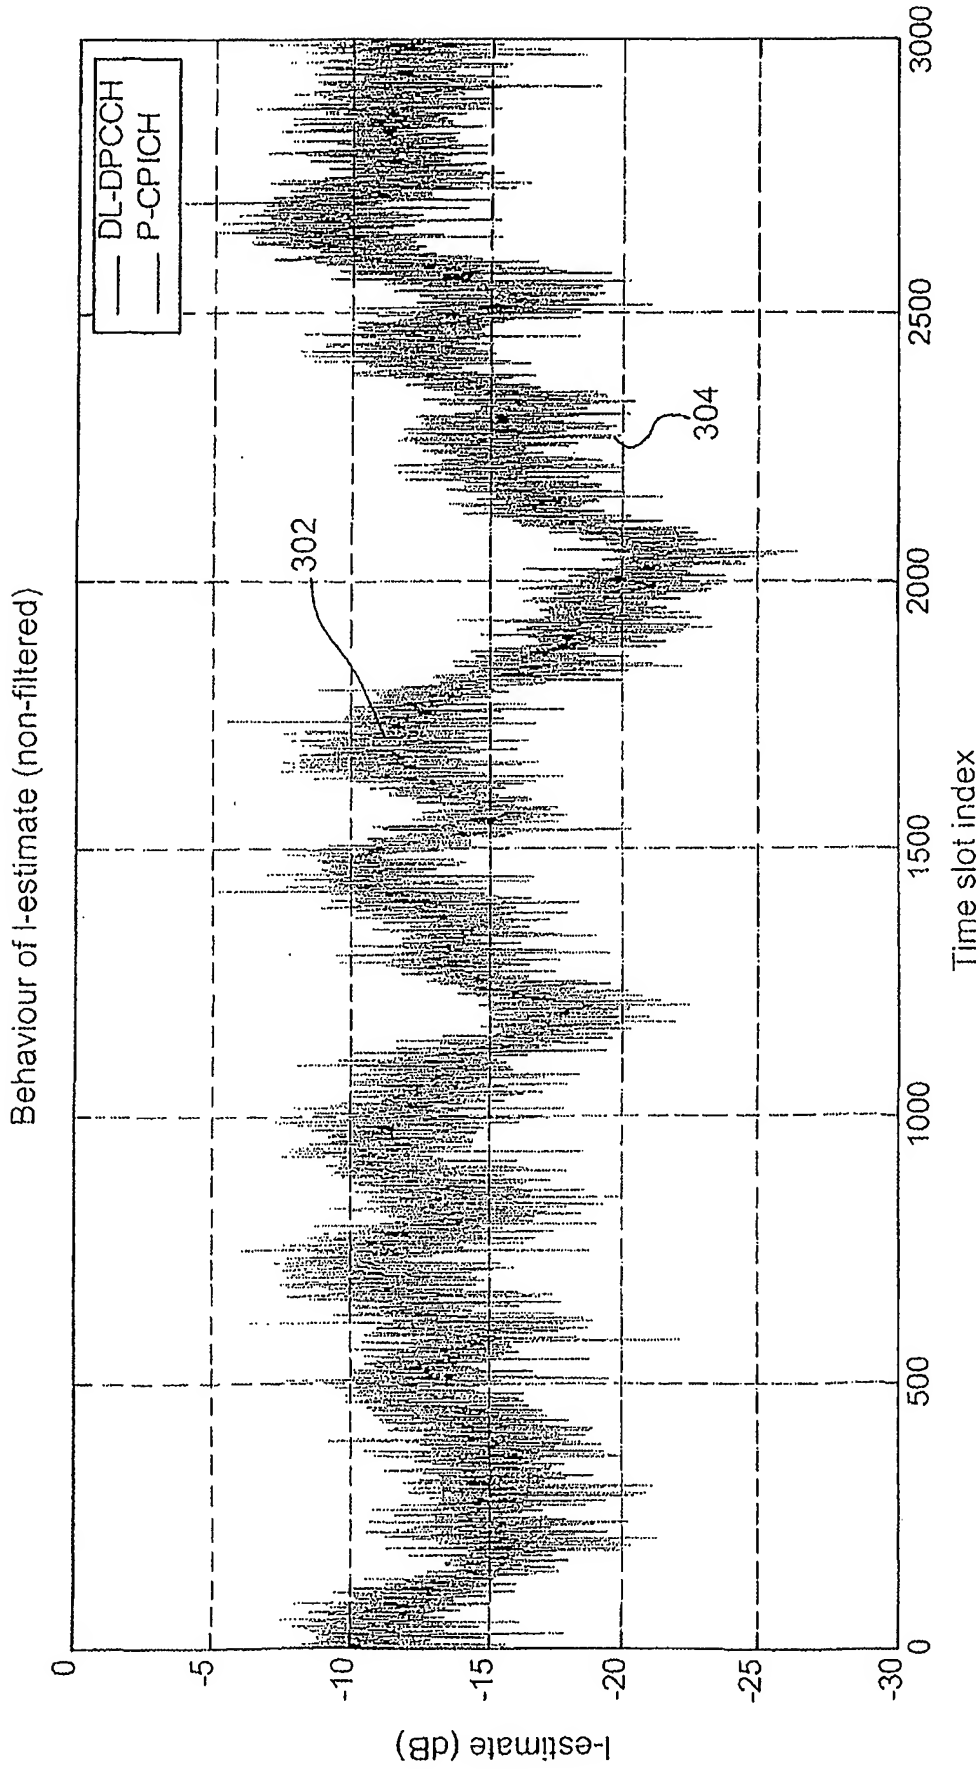


FIG. 3

## INTERNATIONAL SEARCH REPORT

In onal Application No

PCT/EP 01/15155

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04B17/00 H04B7/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y  A	EP 0 977 371 A (NOKIA MOBILE PHONES LTD) 2 February 2000 (2000-02-02)  abstract column 2, line 48 -column 3, line 20 column 4, line 27 -column 5, line 28; figure 1  -----	1,3, 5-11,16, 19,21, 23-30 2,4,17, 20,22
Y	US 6 108 565 A (SCHERZER SHIMON B) 22 August 2000 (2000-08-22)  column 6, line 17 - line 28; figure 1 column 13, line 20 - line 51  ----- -/-	1,3, 5-11,16, 19,21, 23-30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

26 April 2002

Date of mailing of the international search report

07/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Sieben, S

## INTERNATIONAL SEARCH REPORT

In International Application No

PCT/EP 01/15155

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 952 682 A (TEXAS INSTRUMENTS INC) 27 October 1999 (1999-10-27)</p> <p>abstract page 2, line 49 -page 3, line 5; figures 1A,1B page 4, line 19 - line 40; figures 4A,4B</p>	<p>1,3, 5-11,16, 19,21, 23-30</p>
A	<p>WO 00 51389 A (ERICSSON TELEFON AB L M) 31 August 2000 (2000-08-31)</p> <p>abstract page 3, line 15 -page 4, line 16 page 5, line 4 -page 6, line 18; figures 3-5 page 8, line 5 - line 21 page 8, line 36 -page 9, line 22; figure 7</p>	<p>1-6,8, 10,11, 16,17, 19-25, 27,29,30</p>
A	<p>"Universal Mobile Telecommunications System (UMTS); Physical channels and mapping of transport channels onto physical channels (FDD) (3GPP TS 25.211 version 3.4.0 Release 1999)" ETSI TS 125 211 V3.4.0 (2000-09), 'Online! XP002185178 Retrieved from the Internet: &lt;URL:http://pda.etsi.org/pda/queryform.asp &gt; 'retrieved on 2001-12-10! page 24, paragraph 5.3.3.1 -page 25, paragraph 5.3.3.1.2</p>	<p>1,3,5-9, 16,18, 19,21, 23-28</p>

## INTERNATIONAL SEARCH REPORT

In International Application No

PCT/EP 01/15155

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0977371	A	02-02-2000	EP 0977371 A2	02-02-2000
US 6108565	A	22-08-2000	AU 9488598 A	05-04-1999
			BR 9812816 A	08-08-2000
			CA 2302547 A1	25-03-1999
			CN 1278971 T	03-01-2001
			EP 1062746 A2	27-12-2000
			NO 20001026 A	15-05-2000
			PL 339462 A1	18-12-2000
			WO 9914870 A2	25-03-1999
			US 6347234 B1	12-02-2002
EP 0952682	A	27-10-1999	EP 0952682 A2	27-10-1999
			JP 2000050365 A	18-02-2000
WO 0051389	A	31-08-2000	US 6259918 B1	10-07-2001
			AU 2138300 A	14-09-2000
			EP 1159849 A1	05-12-2001
			WO 0051389 A1	31-08-2000